

## 4000 - Model 125

Innovative multi-layer chemical barrier technology, Type 3/4/5 protection

Previously known as: MICROCHEM® 4000 - Model 125-G05

**Heavy-duty multi-layer protective suit, guarding against more than 200 chemical hazards.**



## Industries

- Chemical
- Fire and Rescue
- Food Processing
- Life Sciences
- Mining
- Energy
- Raw material preparation
- Automotive Aftermarket

## Applications

- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of process equipment
- Raw material handling
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of equipment

## KEY FEATURES & BENEFITS

- Exceptional protection, over 200 chemicals permeation tested, including chemical warfare agents
- Designed to protect, typical innovative features include dual zip systems and double cuffs
- Welded and taped seams, our highest barrier to liquids and particulates
- Enhanced comfort, knitted inner cuffs and inner textile type fabric improves wearer acceptance
- Anti-static, tested according to EN 1149-5

## Technology



**MICROCHEM™**  
Chemical Barrier Technology


## Material Diagram




External film barrier layer

Core high barrier film layer

Non-woven inner layer

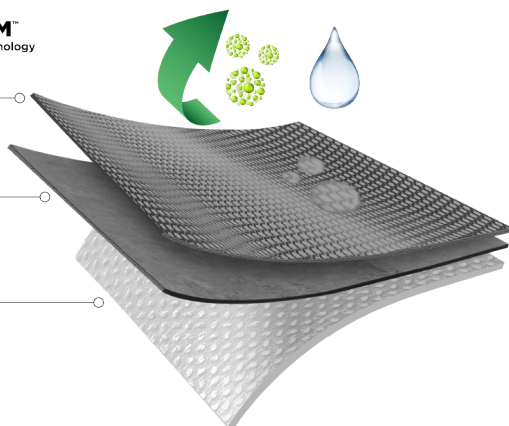

## Seam Diagram

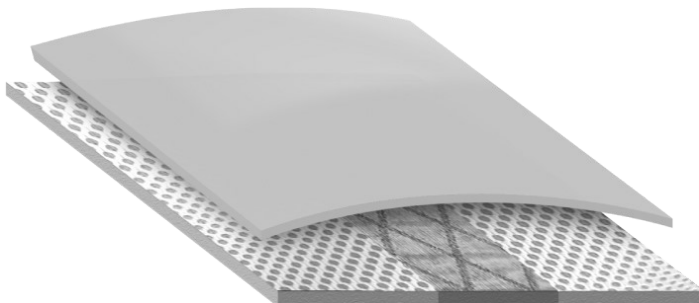

Performance Standards

  
TYPE 3-B

  
TYPE 4-B

  
TYPE 5-B

  
0598

  
EN 1073-2

  
EN 1149-5

  
EN 14126

EN ISO 13688:2013





Product Information

| Product Information |  |
|---------------------|--|
| Available Sizes     | S, M, L, XL, 2XL, 3XL, 4XL, 5XL  |
| Color               | Green  |
| Country Of Origin   | China  |
| Models Available    | 103, 111, 121, 122, 125-G05, 132, 162  |
| Packaging Overview  | Individually Packed  |
| Product Material    | Multi-layer non-woven barrier Laminate fabric                                  |
| Product Reference   | 4000 - Model 125   |
| Standards Overview  | CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5) |
| Seam Type           | Welded and Taped   |
| Shelf Life          | 5 years  |
| Style Number        | G40T125D   |

**For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at**

**Europe, Middle East & Africa Region**

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00

**North America Region**

Ansell Healthcare Products LLC  
T: +1 800 800 0444

**Australia**

Ansell Limited  
T: +61 1800 337 041

**Asia Pacific Region**

Ansell Global Trading Center  
T: +603 8310 6688

**Latin America & Caribbean Region**

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending:  
[www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

