

# ArcoDuct Vac A EL Ducting

## Specification Sheet

Product Code: 3664---

**For further information:**


Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

[hose@arco.co.uk](mailto:hose@arco.co.uk)

[www.arco.co.uk](http://www.arco.co.uk)

Tel: 01482 383280

Fax: 01482 591450

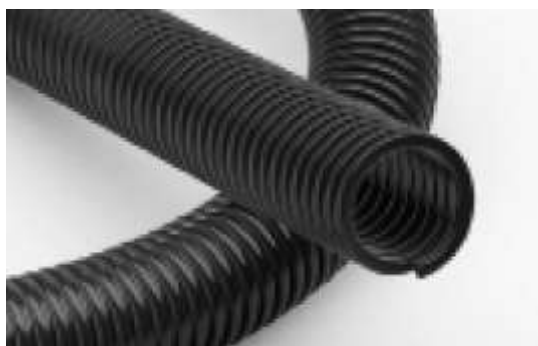

PE-EVA vacuum cleaner hose, electrically conductive to  $<10^6$  Ohm. For applications where the elimination of static build-up is of prime importance.

**Construction:** Hose wall – PE-EVA co-polymer

**Applications:** Suction and transport hose for solid, gaseous and liquid media  
 Suction of fine-grained particles, e.g. dust, powder, fibres  
 Domestic and industrial vacuum cleaners  
 Ventilation  
 Chemical industry

**Properties:** Surface resistance  $<10^6 \Omega$   
 Light, extremely flexible, and crush-resistant  
 Good oil, alkali and acid resistance, plus UV and ozone resistant  
 Air/watertight

Temperature range:  $-40^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ , intermittent to  $+70^{\circ}\text{C}$

Standard length: 20 metre

I.D. (mm)	Bend Radius (mm)	Vacuum (mmHg)	Weight (kg/c)	Code
38	80	367	5.8	3664038
50	100	294	8.4	3664051

All pressure ratings quoted at ambient temperature