

Arco Kool Hi-Vis Safety specs

Specification Sheet

Product Code: 391100

For further information:

Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.35 mm

PD: 68 mm

Lens Base: 9.5 curve

Weight: 27 gm

Lens size vertical: 45 mm

Lens size diagonal: 69 mm


Bridge: 12 mm

Temple length (lens-tip): 157 mm

Overall Width (hinge-hinge): 136 mm

Closest point between lens: 8 mm

Closest point between temple tips: 80 mm

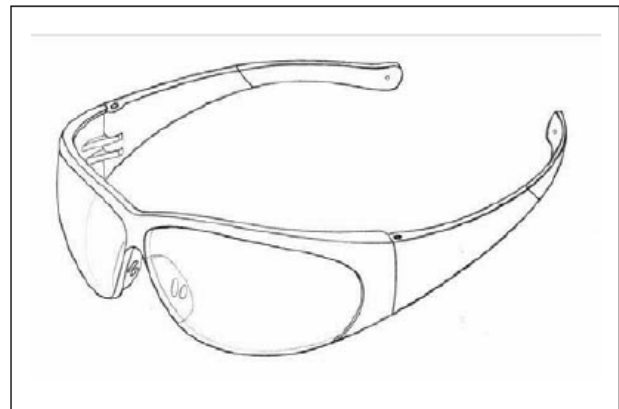

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9.5 curve lens
Frame	Polycarbonate	Wrap around style frame, integral to lens, with side protection
Side Shields	Polycarbonate	Integral to frame
Nose piece	PVC	Snapped onto lens
Temple tip	PVC	Soft tips for comfort
Temple	Polycarbonate	Straight side style, flexible
Hinge	Polycarbonate	5 barrel style, integral to frame/sleeve
Screw	Stainless Steel	Standard screw hinge

SPECIAL FEATURES

- * Hi-vision yellow painting for high contrast; suitable for low-light working conditions
- * Wrap-around lens with integral side shields; universal fitting
- * Lightweight, optical class one, polycarbonate lens resists the high impact (45 m/s)
- * Temples with soft temple tips are comfortable, durable and resilient
- * Anti-scratch coated lens as standard

APPROVAL

- * Ref : 391100 Clear Lens : 2-1.2 arco 1F CE
- * **CE EN166 certified**

PACKING

12 pcs per box
120 pcs per carton

DATE : 19th July 2012

Arco Kool safety specs

Specification Sheet

Product Code: 3E0600, 3E5700**For further information:**

Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.35 mm

PD: 68 mm

Lens Base: 9,5 curve

Weight: 27 gm

Lens size vertical: 45 mm

Lens size diagonal: 69 mm


Bridge: 12 mm

Temple length (lens-tip): 157 mm

Overall Width (hinge-hinge): 136 mm

Closest point between lens: 8 mm

Closest point between temple tips: 80 mm

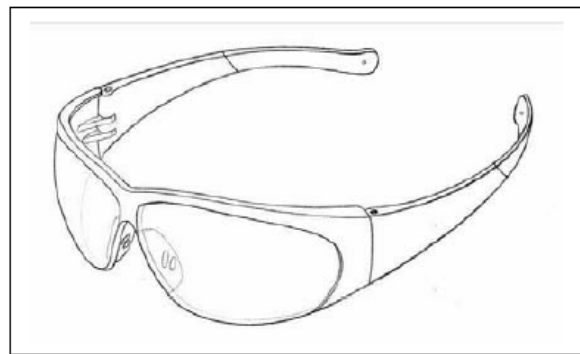

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9.5 curve lens
Frame	Polycarbonate	Wrap around style frame, integral to lens, with side protection
Side Shields	Polycarbonate	Integral to frame
Nose piece	PVC	Snapped onto lens
Temple tip	PVC	Soft tips for comfort
Temple	Polycarbonate	Straight side style, flexible
Hinge	Polycarbonate	5 barrel style, integral to frame/ sleeve
Screw	Stainless Steel	Standard screw hinge

SPECIAL FEATURES

- * Very secure spectacle in sporty style
- * Wrap around lens with integral side shields fit universal faces
- * Lightweight, optical class one, polycarbonate lens resists the high impact
- * 9.5 base wrap lens allow you enough peripheral vision
- * Polycarbonate temple with soft tip is comfortable, durable and resilient
- * Suitable for different work environments for all day wear
- * **CE certified to EN166, optical class 1 & low energy impact resistance F**