

Arco Scorch Safety Spectacle

Specification Sheet

Product Code: 3G0600, 3G0700

For further information:


Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

- Lens thickness: 1.9 mm
- PD: 64 mm
- Lens Base: 8 curve
- Weight: 20 gm
- Lens size vertical: 42 mm
- Lens size diagonal: 78.8 mm
- Bridge: 8.3 mm
- Temple length (lens-tip): 162 mm
- Overall Width (hinge-hinge): 131 mm
- Closest point between lenses: 15.77 mm
- Closest point between temple tips: 71±5 mm

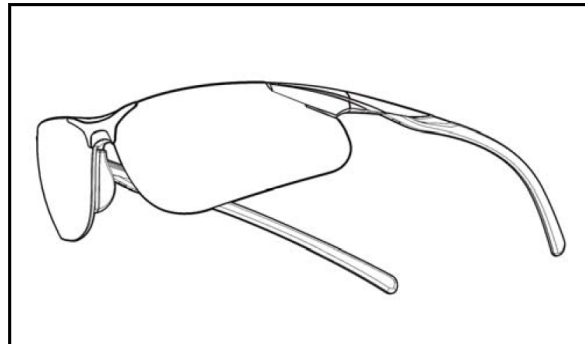

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	8 curve, dual lens
Frame	Polycarbonate	Semi-frame
Nose piece	TPR	Soft pad for all-day comfort
Temple	Polycarbonate	Spatula, co-injected
Temple inlay	NYLON	
Hinge	Polycarbonate	3-Barrel Type
Screw	Stainless Steel	Standard Hinge Screw

SPECIAL FEATURES

- Extremely lightweight: 20 grams
- Slim and streamline temple design creates pressure-free wearing experience
- Compatible with other PPE like helmet and mask
- Full wrap-around lens provides sufficient coverage and premium optical quality
- Soft nose pads guarantee a non-slip and snug fit
- Special dual-injected temple, made of shape-memory material, can be fine-tuned by end user for personal fit
- Impact resistance (45 m/s) at extremes of temperature: -5 ~ 55 Celsius Degree.
- Lenses with premium anti-fog coating can resist to intensive fogging for more than 8 seconds while still performing anti-scratch protection.
- Lenses (including clear lens) provide 100% of UV protection

APPROVAL

- 3G0600 Clear Lens : 2C-1,2 **arco** 1FT KN CE
- 3G0700 Smoke Lens : 5-2,5 **arco** 1FT KN CE
- CE EN166 approval : EN 166-FT on the frame

PACKING

12 pcs per box
120 pcs per carton

DATE : 17 May, 2016