

Arco Zephyr Safety Spectacles

Product Code: 3G2800, 3G2900

Specification Sheet

For further information:


Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.1 mm
 PD: 64 mm
 Lens Base: 8 curve
 Weight: 42 gm
 Lens size vertical: 52 mm
 Lens size diagonal: 64 mm
 Bridge: 21.4 mm
 Temple length (lens-tip): 162 mm
 Overall Width (hinge-hinge): 136.5 mm
 Closest point between lenses: 9.8 mm
 Closest point between temple tips: N/A

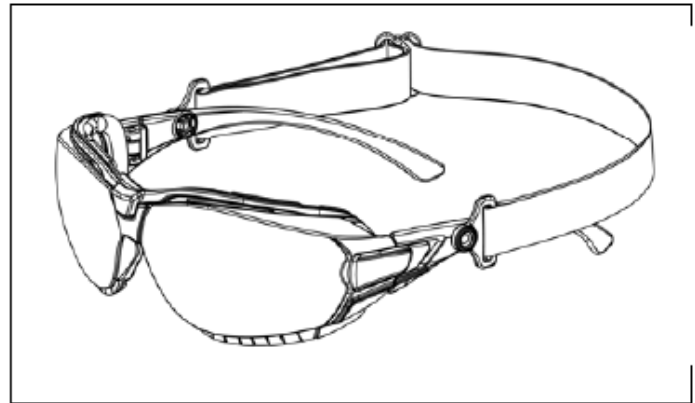

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	8 base curved, integral brow guard
Frame	Polycarbonate	Foam carrier, labeled with soft sponge
Foam	EVA	Integral to the foam
Nose pad	EVA	Integral to the foam
Temple	Polycarbonate	Spatula
Ratchet components	Outside - Polycarbonate	3-position inclination adjustment
	Inside - Nylon	
Headband holder	Polycarbonate	Clip onto the temple
Headband	Textile elastic	Flexible
Fastener	Nylon	Headband length adjustment
Hinge	Polycarbonate	3-Barrel Type
Screw	Stainless Steel	Standard Hinge Screw

SPECIAL FEATURES

- High curved lens with integral brow guard for an overall protection
- Vented foam and foam carrier minimize fogging issue
- Soft foam padding provides comfortable cushion and dust-proof
- Optimal fit and lightweight
- Adjustable side arms for lens inclination in 3 position
- Headband is optional for securing the eyewear in place
- Medium impact resistance (45 m/s)
- Lenses performance: anti-fog and anti-scratch
- UV absorption is built into the raw material to provide 99.9% of UV protection

APPROVAL	PACKING
<ul style="list-style-type: none">● Ref : 3G2800 Clear Lens : 2C-1,2 arco 1F CE Ref : 3G2900 Amber Lens : 2-1,2 arco 1F CE● CE EN166 approval : EN 166-F on the frame	12 pcs per box 120 pcs per carton

DATE : 22 April 2014