

Arco Skarn Safety Spectacle

Specification Sheet

Product Code: 3G4100, 3G4200**For further information:**


Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 1.9 mm
PD: 64 mm
Lens Base: 10 curve
Weight: 24 gm
Lens size vertical: 44.7 mm
Lens size diagonal: 73 mm
Bridge: 15.1 mm
Temple length (lens-tip): 156 mm
Overall Width (hinge-hinge): 138.5 mm
Closest point between lenses: 12.5 mm
Closest point between temple tips: 72±2 mm

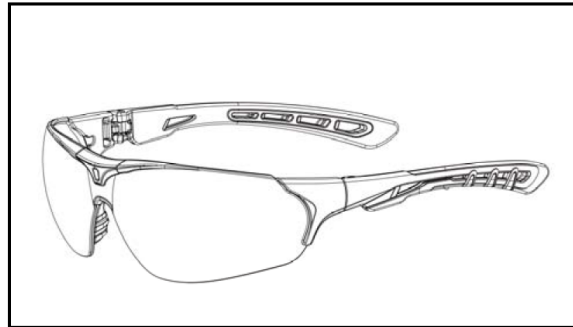

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	10 curve, one-piece lens
Side component	Polycarbonate	Connecting lens and temple
Nose piece	TPR	REACH compliance
Temple	Polycarbonate	Spatula, co-injected
Temple inlay	TPE	
Hinge	Polycarbonate	3-Barrel Type

SPECIAL FEATURES

- Metal free, 100% Dielectric design
 - Sport-oriented safety eyewear with peripheral protection
 - Full eye coverage & optical-class-1 quality
 - Extended soft temple inlay provides snug fit over the ears
 - Soft and pliable nose pieces for maximum comfort
 - Lens and temples are made from virtually unbreakable polycarbonate
 - Impact resistance (45 m/s) at extremes of temperature: -5 ~ 55 Celsius Degree
 - Lenses (including clear lens) provide 100% of UV protection
-
- 99.9 % UV Protection

APPROVAL

- 3G4100 Clear Lens : 2C-1,2 **arco** 1FT CE
- 3G4200 Smoke Lens : 5-2,5 **arco** 1FT CE
- CE EN166 approval : EN 166-FT on the frame

PACKING

12 pcs per box
120 pcs per carton

DATE : 17 May, 2016