

Data sheet

MILAN 2.0 HUB**GENERAL**

Art. no.:	A-028	E-class number:	40-02-01-06
EAN:	4030281155850	Customs tariff number:	84251900
Standard:	EN 1496:2007 EN 341:2011		

Data sheet

MILAN 2.0 HUB

The MILAN 2.0 HUB is additionally equipped with a lifting function. This enables an accident victim to be lifted across a short distance, in order to release the victim's lanyards, after which the victim can then be safely lowered by rope (where the new housing design improves handling for the accompanying rescue). The SUPER STATIC 9.0 static rope fulfils this requirement despite its diameter of only 9 mm. The packing size of the MILAN 2.0 HUB is small compared to ropes which are 10.5 mm in diameter. This is a major advantage, in particular, at great heights.

NORMEN


Internat. standard:	ANSI Z359.4:2007
---------------------	------------------

MERKMALE

Abseiling speed:	0,9 m/s
Abseiling height:	500 m
Max. number of persons:	2
Max. rated load:	260 kg
Temperature:	from -35 °C to 60 °C
Suspension element:	Super Static 9mm

Area of application:

Anti Corrosion Coating, Lift Construction, Police/Military/Special Forces, Power Supplies, Power Transmission, Rescue, Rope Courses, Telecommunication, Wind Power

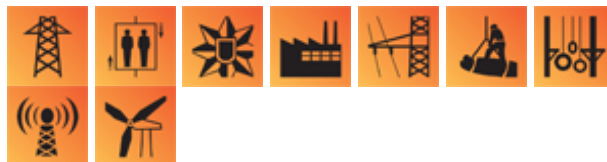

MAßE

Weight:	3.11 kg
---------	---------

KARABINER

Carabiner on rope:	KOBRA TW
Carabiner on anchoring point side:	KOBRA TW