








DeckStep


Multi-purpose ribbed vinyl matting for industry

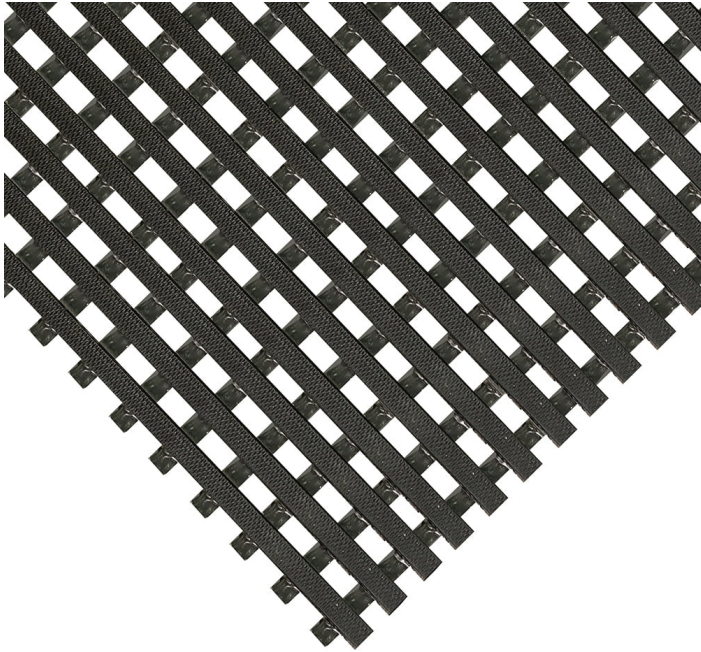


- Raises workers off the ground like traditional duckboard.
- Reduces the risk of slips by removing feet from direct contact with spilt liquids.
- Provides a much more comfortable standing surface than concrete.
- Textured surface provides slip resistance.
- Flexible and lightweight – easy to move and clean.
- Strips are welded together for strength.
- Slip tested to DIN 51130.




Styles Available




Red




Grey



Green



Blue



Black

Parts

Part Number	Size	Colour	Weight (kg)
DS061210C	1.2 m x per linear metre	Grey	9
DS011010C	1.0 m x per linear metre	Black	7.5
DS011010	1.0 m x 10 m	Black	75
DS061210	1.2 m x 10 m	Grey	90
DS010610C	0.59 m x per linear metre	Black	4.5
DS061010C	1.0 m x per linear metre	Grey	7.5
DS010610	0.59 m x 10 m	Black	45
DS061010	1.0 m x 10 m	Grey	75
DS060610C	0.59 m x per linear metre	Grey	4.5
DS060610	0.59 m x 10 m	Grey	45
DS041210C	1.2 m x per linear metre	Green	9
DS041010C	1.0 m x per linear metre	Green	7.5
DS041010	1.0 m x 10 m	Green	75
DS040610C	0.59 m x per linear metre	Green	4.5
DS040610	0.59 m x 10 m	Green	45
DS031210C	1.2 m x per linear metre	Red	9
DS031010C	1.0 m x per linear metre	Red	7.5
DS031010	1.0 m x 10 m	Red	75
DS030610C	0.59 m x per linear metre	Red	4.5
DS030610	0.59 m x 10 m	Red	45
DS021210C	1.2 m x per linear metre	Blue	9
DS021210	1.2 m x 10 m	Blue	90
DS021010C	1.0 m x per linear metre	Blue	7.5
DS021010	1.0 m x 10 m	Blue	75
DS020610C	0.59 m x per linear metre	Blue	4.5
DS020610	0.59 m x 10 m	Blue	45
DS011210C	1.2 m x per linear metre	Black	9
DS011210	1.2 m x 10 m	Black	90

Technical Specifications

Material	PVC
Surface Finish	Cross ribbed lattice
Product Height	11.5 mm ±0.5 mm
Product Weight	7.5 kg / m²
Min. Operating Temperature	-30°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	Resistant to acid and alkali
Environmental Resistance	Suitable for wet and dry indoor environments
Typical Applications	General industrial, Production lines, Assembly areas, Packing stations, Workbenches.
Installation Method	Loose lay
Cleaning Method	Easily cleaned with hot soapy water or pressure washer
Slip Tested to	DIN 51130 - R10

Additional Information



Deckstep DIN 51097 Ramp Slip Test



Deckstep DIN 51130 Ramp Slip Test

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@coba.com

www.coba.com