


COBAMAT STANDARD

KEY FEATURES

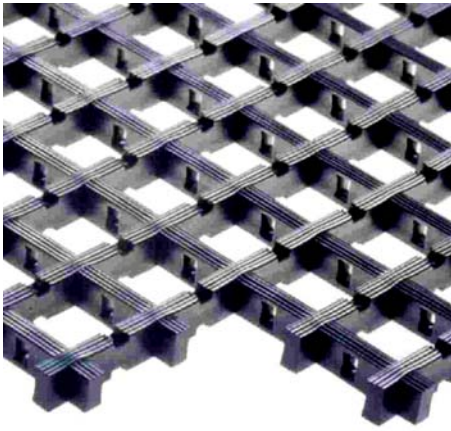

- ① Additional comfort fights operator fatigue.
- ② Cross-ribbed surface reduces the risk of slipping, conforming to BIA anti-slip test.
- ③ Enhances the appearance of the workplace.
- ④ Debris falls through holes and can be swept away with ease.
- ⑤ Fully reversible.

SUITABLE APPLICATIONS

◆Wet/Oily and Dry environments.
◆Ideal for **ENGINEERING** areas and **INDUSTRIAL** environments, particularly for **PRODUCTION/ASSEMBLY LINES** and **MACHINE TOOL AREAS** where swarf is in abundance.

FATIGUE PREVENTION	WEAR TOLERANCE	SLIP RESISTANCE
Good	Good	Good

PRODUCT DATA

Material: Flexible PVC extrusions
Appearance: Cross-ribbed woven
Hole size 22 mm x 22 mm, thickness 12 mm
Chemical Resistance: * Resistant to most mild acids, alkalis, and general industrial chemicals.
UV Resistance: Resistant to UV - NB>Red is not colourfast in direct sunlight.
Operating Temperature: -20°C to +60°C
Flame Retardancy: Conforms to DIN 4102

INSTALLATION & CLEANING

Installation: Simply unrolled or laid loose
Cleaning: Pressure wash or steam clean using, if required, a mild detergent.

SIZES & OPTIONS

Optional Extras: * **Fixing Blocks** are available to secure the matting.
* **Bevelled Safety Edging** factory fitted to help keep the matting in place and to prevent operators tripping onto the mat.

Sizes: Available in rolls or single mats.
Widths: 0.6 m, 0.9 m, 1.0 m, 1.2 m and 1.5 m
Lengths: 5 m or 10 m
Special sizes available on request

Colours: Red, Black, Blue, Green, Yellow, Grey or Brown
Country of Origin: UK

* Please refer to Support Notes at back of Manual

