


COBAMAT HEAVY

KEY FEATURES

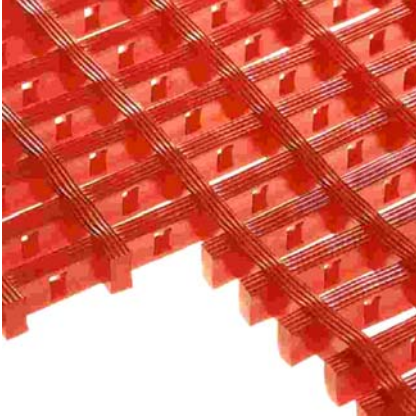

- ① Closest hole pitch of all the Cobamat products provides high wear tolerance.
- ② Cross-ribbed surface provides better grip.
- ③ Enhances the appearance of the workplace.
- ④ Insulates the operator from a cold concrete floor.
- ⑤ Can withstand the weight of pallet trucks and trolleys.
- ⑥ Suitable for areas with high pedestrian

traffic.

SUITABLE APPLICATIONS

◆Wet/Oily and Dry environments.

◆Ideal for **ENGINEERING** areas and **INDUSTRIAL** environments, particularly for **PRODUCTION/ASSEMBLY LINES** and **WALKWAYS** with high pedestrian traffic areas.

NOT SUITABLE FOR FORK LIFT TRUCKS.

FATIGUE PREVENTION	WEAR TOLERANCE	SLIP RESISTANCE
Moderate	Excellent	Good

PRODUCT DATA

Material:	Flexible PVC extrusions
Appearance:	Cross-ribbed woven
	Hole size 22 mm x 10 mm, thickness 12 mm
Chemical Resistance:	* Resistant to most mild acids, alkalis, and general industrial chemicals.
UV Resistance:	Resistant to UV - NB>Red is not colourfast in direct sunlight.
Operating Temperature:	-20°C to +60°C
Flame Retardancy:	Conforms to DIN 4102

INSTALLATION & CLEANING

Installation:	Simply unrolled or laid loose
Cleaning:	Pressure wash or steam clean using, if required, a mild detergent.

SIZES & OPTIONS

Optional Extras:	* Fixing Blocks are available to secure the matting. * Bevelled Safety Edging factory fitted to help keep the matting in place and to prevent operators tripping onto the mat.
-------------------------	---

Sizes:	Available in rolls or single mats. Widths: 0.6 m, 0.9 m, 1.0 m, 1.2 m and 1.5 m Lengths: 5 m or 10 m <i>Special sizes available on request</i>
---------------	---

Colours:	Red, Black, Blue, Green, Yellow, Grey or Brown
-----------------	--

Country of Origin:

UK

** Please refer to Support Notes at back of Manual*