




COBAstat®

Comfortable anti-static mat for dry environments



- Comfortable and durable floor mat protects operatives from static build-up.
- ESD version of our popular Orthomat® anti-fatigue range.
- Grounded via a 10 mm male stud fitted to the mat.
- Maximum performance when used with grounding wire.
- Available as a handy COBAstat® Floor Kit with accessories provided.
- Tested to EN14041 resistance requirements.
- Rv: $1.1 \times 10^7 \Omega$

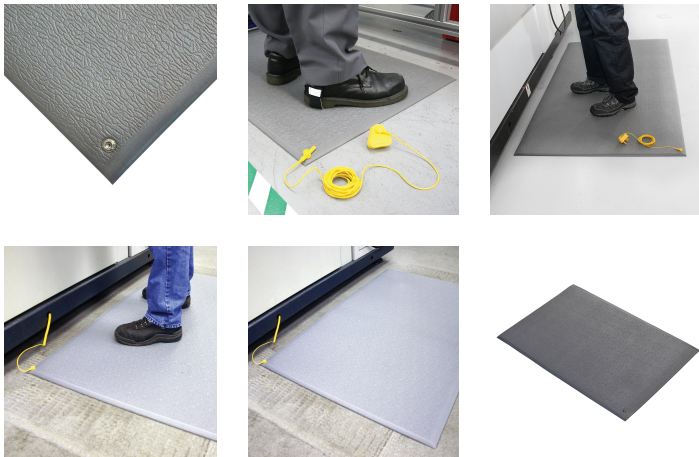

Parts

Part Number	Size	Colour	Weight (kg)
AS060003C	0.9 m x per linear metre (max. 18.3 m)	Grey	2
AS060003	0.9 m x 18.3 m	Grey	40
AS060002	0.9 m x 1.5 m	Grey	4.5
AS060001	0.6 m x 0.9 m	Grey	2

Technical Specifications

Material	Closed cell PVC foam
Surface Finish	Pebble
Product Height	9 mm
Min. Operating Temperature	0°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	PVC is resistant to many different chemicals, alkalis and general industrial chemicals. PVC resists alcohols, aliphatic hydrocarbons, oils, weak acids, strong mineral acids and alkalis. PVC resists oil and grease if properly cleaned. PVC does not resist organic solvents, ketones, esters and aromatic

hydrocarbons. Please contact us for more specific details

Environmental Resistance	Suitable for dry indoor environments
Typical Applications	Around machinery where static build up is common.
Installation Method	Loose lay
Accessories	HR07#1, HR08#1, HR06#1, HR05#1, HR11#1, HR09#1,ESD1#1,ESD2#1
Cleaning Method	Brush or mop the top surface

Additional Information



COBAstat ESD Test BS EN 14041

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@coba.com

www.coba.com