


# ARCOstep III

## KEY FEATURES

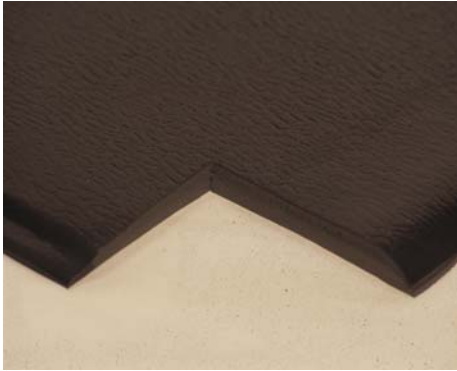

- ❶ Dual layer foam construction provides excellent anti-fatigue properties.
  - ❷ Top textured surface gives exceptional resistance to wear and tear.
- ❸ Supplied with bevelled edges.
- ❹ Available in specific lengths and cut from the roll in three colours to identify cell areas.
- ❺ Effectively insulates against a cold concrete floor.

## SUITABLE APPLICATIONS

◆ Dry environments.  
 ◆ Ideal for **INDUSTRIAL** use, in dry, indoor situations, particularly **PRODUCTION LINES, ASSEMBLY AREAS, PACKING STATIONS** and **WORKBENCHES**. Especially effective in areas where **operators have to turn frequently**.

FATIGUE PREVENTION	WEAR TOLERANCE	SLIP RESISTANCE
Excellent	Excellent	Good

## PRODUCT DATA

<b>Material:</b>	High-density vinyl foam bound to a soft, moisture resistant, closed cell Vinyl sponge.
<b>Appearance:</b>	Textured finish Thickness: 12.5 mm nominal
<b>Chemical Resistance:</b>	* PVC is resistant to many different chemicals, alkalis and general industrial chemicals. Resists alcohol's, aliphatic hydrocarbons, oils, weak acids, strong mineral acids and alkalis. Resists oil and grease if properly cleaned. Does <u>NOT</u> resist organic solvents, ketones, esters and aromatic hydrocarbons.
<b>UV Resistance:</b>	N/A
<b>Operating Temperature:</b>	0°C to +60°C
<b>Flame Retardancy:</b>	Conforms to FMVSS 302. Will not burn after the ignition source is removed. When 'forced' to burn, Carbon Monoxide, Carbon Dioxide and Hydrogen Chloride fumes are emitted.

## INSTALLATION & CLEANING

<b>Installation:</b>	Loose lay
<b>Cleaning:</b>	Brush/mop the top surface.

## SIZES & OPTIONS

<b>Sizes:</b>	Charcoal: 0.9 m x 0.6 m, 0.9 m x 1.5 m, 0.9 m x 3.65 m
	0.6 m x 18 m, 0.9 m x 18 m, 1.2 m x 18 m

Green: 0.9 m x 18 m  
Blue: 0.9 m x 18 m  
*Special sizes available on request*

**Country of Origin:** USA

*\* Please refer to Support Notes at back of Manual*