




Fatigue-Step

Safety rubber tiles for playgrounds

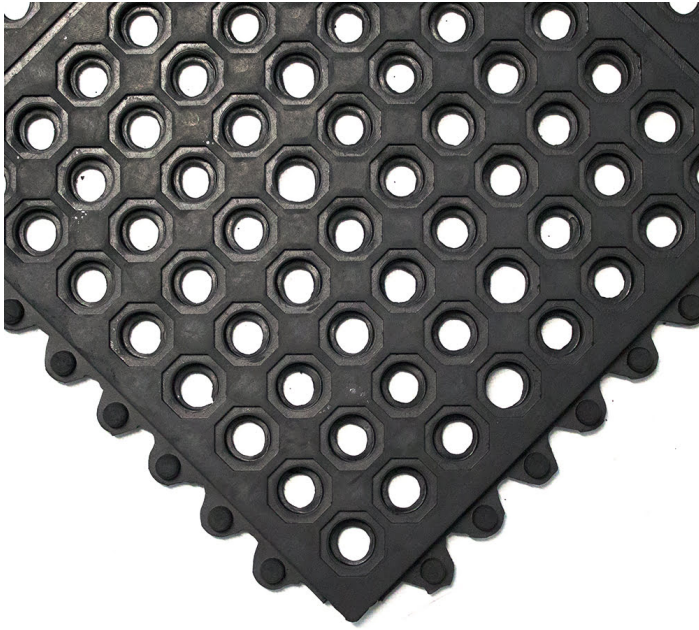

- Interlocking rubber tile system to cover large or small areas.
- Provides safety for playgrounds.
- Anti-slip surface reduces risks (tested to DIN 51130).
- Ideal safety matting for outdoor areas.
- Durable and easy to clean.
- Easy to relocate or replace.
- Fits in natural environment.
- Suitable for all weather, extreme temperatures and resists wind uplift
- Open holes allow grass growth and provide optimal drainage.



Parts

Part Number	Size	Colour	Weight (kg)
SS010001	0.9 m x 0.9 m	Black	9.95

Technical Specifications

Material	Rubber mix, including >50% recycled material
Surface Finish	Textured with holes to allow drainage
Product Height	18 mm
Hole Size	22 mm
Min. Operating Temperature	-20°C

Max. Operating Temperature	+130°C
Resistance to Chemicals	Natural rubber offers limited resistance to chemicals and oils
Environmental Resistance	Suitable for wet and dry environments. Will withstand welding splatter and spillages of other hot materials.
UV Resistance	Yes
Typical Applications	Childrens play areas
Installation Method	Loose lay interlocking tiles
Accessories	SSNB#1, SS00#1, SSB1#1, ALUR#1
Cleaning Method	Wash with cold water, use vacuum cleaner or use pressure pump to remove dirt
Storage and application	Store at room temperature, free from deformations.
Tensile Strength	3 to 3.5 MPa
Notes	Silicone is used in the production process of the mats and a residue will possibly be left on the mat. This can be washed off using hot soapy water.
Slip Tested to	DIN 51130 - R10

Additional Information



Installation Guide



Fatigue Step DIN 51130 Ramp Slip Test

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@coba.com

www.coba.com