

MonoLight LED

(BS 3143 pt 2 and EN 12352 compliant)



Robust and Durable LED Lamp

- Single battery lamp
- Enhanced visibility with LEDs
- Automatic solar switch
- 180 mm diameter polycarbonate lens
- Long operating times with minimum power consumption
- Robust locking system of battery section with captive security bolt
- Locking screw with 3/16" hexagonal recess
- Complies to BS 3143 pt 2 and EN 12352

MonoLight LED

(BS 3143 pt 2 and EN 12352 compliant)



MonoLight LED

With new robust locking system of battery section


The lens has a diameter of 180 mm with retroreflective surround. A plastic suspension loop can be used for carrying or rapid fastening of the MonoLight. The tough casing is made of high impact plastic material and has a polycarbonate lens. Both lamp and lens are UV-stabilised and without cadmium making the product fully recyclable. The electronics is well protected from any water ingress.

Three brackets are available for mounting on vertical tubes up to Ø 52 mm, on square barriers or on traffic cones.


A new captive screw bolt makes it easier to change the battery. Nissen NiKo key is supplied to operate (On/Off) or to open the lamp.

Example of typical operating times:

With only one Konstant 25 battery and with constant brightness, an operating time of 3.800 hours (320 days) flashing light or 950 hours (80 days) continuous light is obtained.

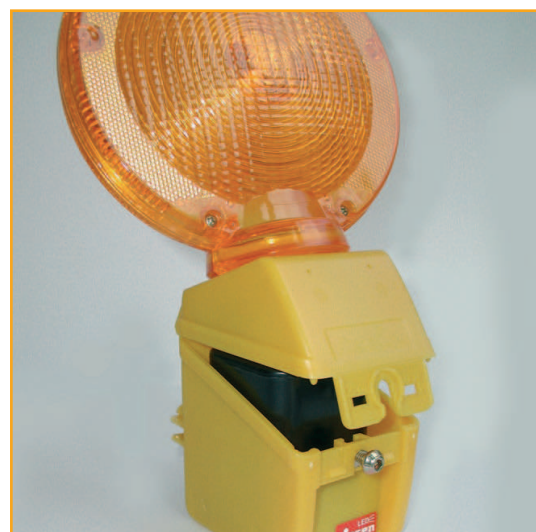

with new robust locking system

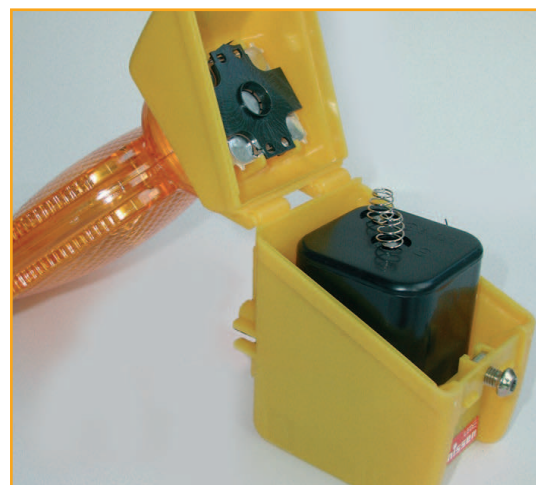

6V Battery

MonoLight LED

MonoLight LED , flashing/steady light, two-sided, amber :	111 602-10
MonoLight LED , flashing/steady light, two-sided, amber, c/w metal bracket for barriers:	111 602-51
MonoLight LED , flashing/steady light, two-sided, red, c/w metal bracket for barriers:	111 602-53

Accessories

Premium 800, 6 V (normal trade) 1	55 051
Battery Konstant 25, 6 V, 25 Ah (air alkaline)	155 054
NiKo key	70 090-1
Cone bracket	292 032-3

Operating times with one battery

with battery Premium 800	steady light 300 hrs (25 days)
	flashing light 1200 hrs (100 days)
with battery Konstant 25	steady light 950 hrs (80 days)
	flashing light 3800 hrs (320 days)

Technical data

Intensity	15 cd
Light colour	Amber
Flash rate	60-70 fl./min.

Packing unit

12 lamps c/w plastic cone bracket in one carton / 240 lamps on one pallet



Open using NiKo key



Cone bracket



NiKo key



Cone mounted

Subject to technical modifications. For supply of these and many other Nissen products please contact Nissen UK Limited.

Nissen UK Limited

51 Queen of Denmark Court | London | SE16 7 TB | United Kingdom | Tel: +44 (0) 207 2 37 75 74 | Fax: +44 (0) 207 3 94 63 17

E-Mail: info@nissen-uk.com | www.nissen-uk.com