

# Disley

## Description & Diagrams.

**Product Code;**  
C945CC

**Fabric Details.** 116x54-45TCX40C- 70%Cotton 30%Polyester.

**Product Name;**  
Craigavon;

**Fabric Colour** White Oxford, **Weight** 130gms.

**Verified by;** Ken  
**Issue No** 4

**Block Pattern Reference** CM25

**Date;** 16-01-18

**Page** 4 of 8

1. 2 piece Semi Cutaway Collar with 3mm top stitch. as per Original sample. with plastic collar stays/bones, 6mm Tie space, Permess interlining Quality. Model M-837977-Base H-837976-Bias band H-837976
2. 3cm fused front placket, with 5mm top stitching, Permess interlining P904.
3. 2cm front button Chain stitched hem.
4. Mitre Cuff, with 2 buttons & 2 button-holes, with 3mm top stitching. Permess interlining Quality H-837976, with 14/4 button and button-hole on sleeve guards.
5. Felled under arm and side seams. 5mm between stitch lines.
6. 1cm French arm-hole seam.
7. 2 Ply Back yoke with 1mm top edge stitching on front and back yoke.

8. Round tail bottom, with 6mm double turned hem.
9. 6 button-hole on centre front from size 14 to 16.5, and 7 button-holes from size 17 up; Please Note; Buttons must be cross-stitched with correct stitch count, securely attached and perfectly aligned. Please Note; last button-hole is Horizontal.
10. 2 Back pleats, 9cms from arm-hole seam.
11. Heritage Label; position 2.5cms from neck seam, +or- 5mm. with size label Heritage swing ticket.
12. Stitch count, 12 to 14 stitches per 2.5cms.
13. Chain stitching to be used on back yoke, front hem and shoulder inside seams.

**Button Spacing on centre front, first button 6cms from collar seam to centre button. 9cms spacing for balance of button holes.**

Edge Stitch front Yoke.

1cm French Seam arm-holes.


Pointed Sleeve Guard with 14L button & b-hole

5mm Felled under-arm & Side Seams

6cm Depth Mitre Cuff with 2 buttons & button-holes.

3cm Fused Front Placket with 5mm top stitching.

2cm Front Hem with spare buttons 16 & 14L.

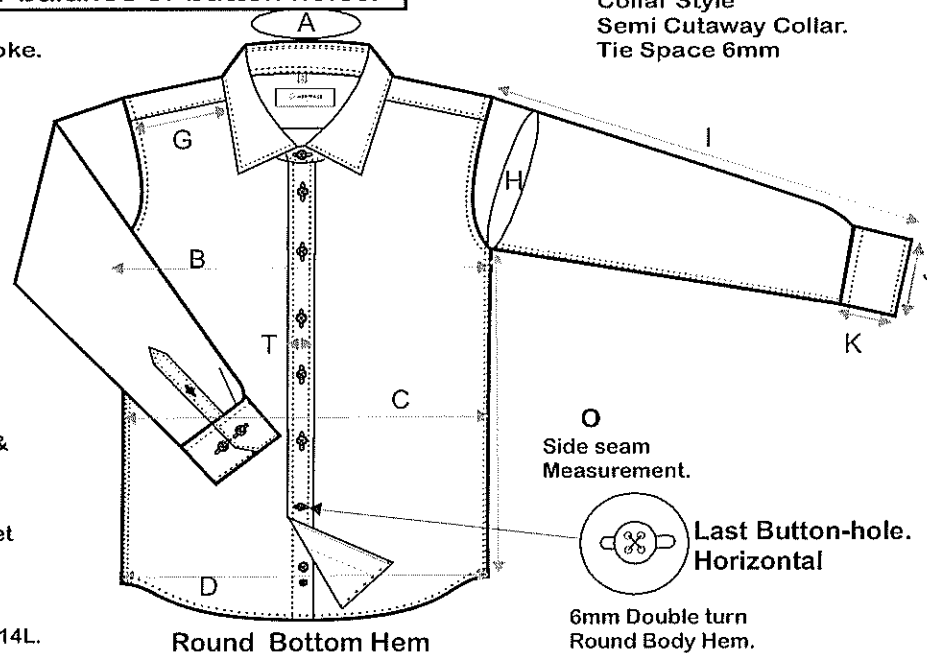

2 ply BackYoke;  
Depth 9cms

Edge Stich back yoke.

